

1207


Mando de 4 canales autoamplificado 4-channel control unit

- Mando de control para 4 canales. Amplificador integrado de 2 W para conectar hasta 4 altavoces.
- Regulación digital del volumen en 80 pasos de 1dB.
- Almacenamiento del número de zona en el proceso de SETUP.
- Difusión de mensajes con prioridad.
- Puede ser controlado desde la consola 1202.
- Cabe destacar la entrada PIN que permite inyectar la señal de audio procedente de previos de micrófono (1105 + 1107) y/o entradas auxiliares (1106) dotando a la estancia donde se ubica de una actuación autónoma en eventos esporádicos (refuerzo de palabra en reuniones, audiovisuales, etc.).
- 1207.10 (blanco). 1207.12 (negro).
- 4-channel control unit, 2 W power for connecting up to 4 speakers.
- Digital volume regulation with 80 steps of 1 dB.
- It can store a zone number in the setup process.
- Digital message broadcast with override facility.
- It can be controlled from a control console 1202.
- The PIN input allows the connection of a set 1105 + 1107 (microphone input + volume regulator), as well as AUX inputs 1106. By doing this, the room where the 1207 unit is installed will improve its performance for audiovisual events line multimedia presentations, speeches, conferences, etc.
- 1207.10 (white). 1207.12 (black).



ELEMENTOS

ELEMENTS

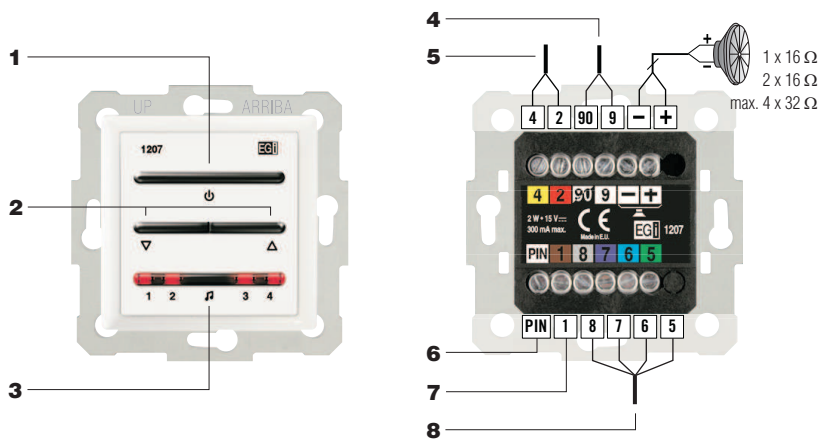

- 1 Pulsador de encendido/apagado.
ON/OFF push button.
- 2 Selector de volumen.
Volume selector.
- 3 Selector de canales.
Channel selector.
- 4 Datos digitales (línea general).
Digital data (general line).

- 5 Alimentación (línea general).
Power supply (general line).
- 6 Entrada de señal de audio.
Message audio.
- 7 Entrada de avisos con prioridad.
Priority input.
- 8 Línea general.
General line.

SETUP

Durante la configuración de la instalación, cuando se asigne la zona, los leds indicadores de los canales 3 y 4 parpadearán lentamente. Al pulsar cualquier tecla se asigna automáticamente la zona dejando de parpadear. Una vez concluido el setup de toda la instalación recupera el funcionamiento normal.

Cuando recibe un aviso los leds 2 y 3 permanecen iluminados mientras dura este.

Difusión de mensaje con prioridad.

Mientras un mensaje prioritario (recibido en la entrada PIN) está siendo difundido, los leds de los canales 2 y 3 se iluminan y el mando se autoconfigura a su máximo volumen. El nivel de volumen de la señal de audio debe ser regulado en el dispositivo conectado a la entrada PIN.

SETUP

During the setup of the system, when zone numbers are being assigned, the channel indicator lamps corresponding to channels 3 and 4 will blink slowly. When pressing any key the zone number is assigned and the leds will stop blinking. When the setup process is finished, the control keyboard will turn back to its normal operation mode again.

Message Broadcast With Priority

While a priority message (received at the PIN inlet) is being broadcast, the lamps of channels 2 and 3 will light, and the control unit is self-configured at its maximum volume level. The volume level of the audio signal should be regulated at the device that is connected to the PIN input.

DATOS TÉCNICOS

TECHNICAL DATA

Datos técnicos Technical data

Alimentación	DC power supply
Consumo máximo	Current consumption (@ max. power)
Potencia	Power
Alojamiento	Housing
Dimensiones (mm)	Dimensions (mm)

1207

15 V \pm
340 mA
2 W; impedancia mínima de carga 8 Ω • 2 W; minimum line impedance 8 Ω
\varnothing 60 mm.
45 x 45 x 52


1207

Mando de 4 canales autoamplificado
4-channel control unit



MANDO 4 CANALES 1207.
AMPLIFICADOR PRIORIDAD 1309.1

4-CHANNEL CONTROL UNIT 1207.
AMPLIFIER WITH MESSAGE OVERRIDE 1309.1.

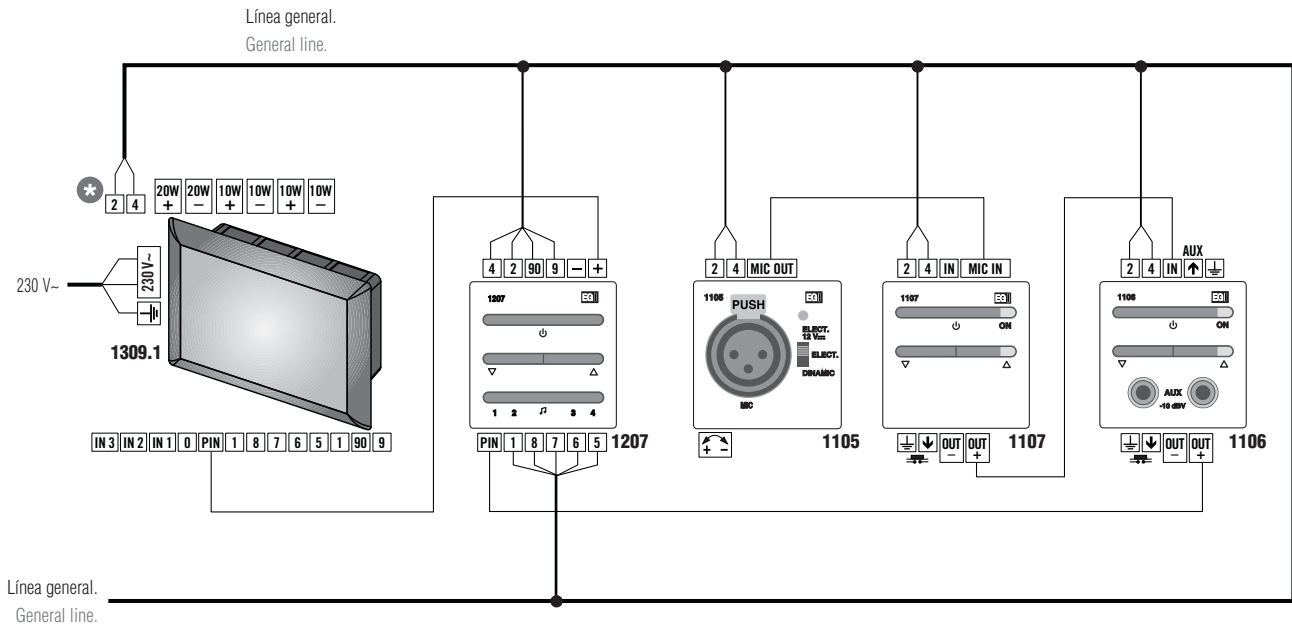

* No conectar el hilo "2" a la Línea General.
Do NOT connect wire nr. "2" to the general line.